



Led Driver PWM Dimmable

IP67 Constant Voltage PWM Converters



Product

- Constant Voltage PWM Style Output
- Universal AC input (up to 305VAC)
- High Efficiency up to 90.5%
- No Load Power Consumption <0.5w
- Built-in 3 in 1 Dimming Function (0-10VDC, PWM Signal or Resistance)
- 5 year Warranty

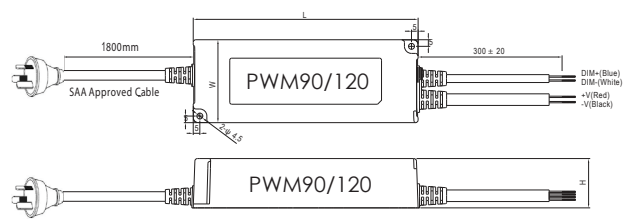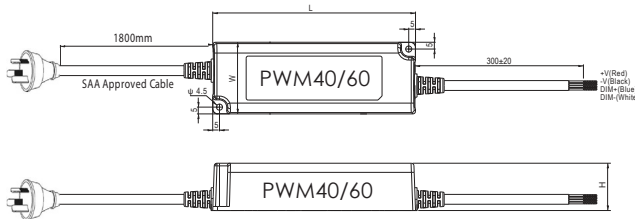

| Technical Data - Xulux Code | PSU40DPWM-IP67-12 | PSU60DPWM-IP67-12 | PSU90DPWM-IP67-12 | PSU120DPWM-IP67-12 |
|-------------------------------------|---------------------------|---------------------------|---------------------------|---------------------------|
| Technical Data - Meanwell Code | PWM-40-12 | PWM-60-12 | PWM-90-12 | PWM-120-12 |
| Voltage Range | 90-305 VAC 127-431 VDC | 90-305 VAC 127-431 VDC | 90-305 VAC 127-431 VDC | 90-305 VAC 127-431 VDC |
| Output Voltage | 12V | 12V | 12V | 12V |
| Efficiency (@230v, 50Hz, full load) | >86% | >86% | >88% | >88% |
| Output Power (ta < 50 deg C) | 40 W | 60 W | 90 W | 120 W |
| Output Power Range | 5-40 W | 5-60 W | 5-90 W | 5-120 W |
| Dimensions LxWxH (mm) | 150x53x35 | 150x53x35 | 171x63x38 | 191x63x38 |
| Dimming Range | 0-100% | 0-100% | 0-100% | 0-100% |

| Technical Data - Xulux Code | PSU40DPWM-IP67-24 | PSU60DPWM-IP67-24 | PSU90DPWM-IP67-24 | PSU120DPWM-IP67-24 |
|-------------------------------------|---------------------------|---------------------------|---------------------------|---------------------------|
| Technical Data - Meanwell Code | PWM-40-24 | PWM-60-24 | PWM-90-24 | PWM-120-24 |
| Voltage Range | 90-305 VAC 127-431 VDC | 90-305 VAC 127-431 VDC | 90-305 VAC 127-431 VDC | 90-305 VAC 127-431 VDC |
| Output Voltage | 24V | 24V | 24V | 24V |
| Efficiency (@230v, 50Hz, full load) | >89% | >89% | >90.5% | >90% |
| Output Power (ta < 50 deg C) | 40 W | 60 W | 90 W | 120 W |
| Output Power Range | 5-40 W | 5-60 W | 5-90 W | 5-120 W |
| Dimensions LxWxH (mm) | 150x53x35 | 150x53x35 | 171x63x38 | 191x63x38 |
| Dimming Range | 0-100% | 0-100% | 0-100% | 0-100% |