

## Distribution Warehouse Application



Bildarkiv Central Warehouse, Sweden

- Easy To Use
- Simple To Install
- Energy Saving
- Occupancy Detection
- Fully Automated
- Remote Monitoring

## Requirements

A large distribution warehouse operating on a 24 hour basis, 7 days per week that requires pre-set lighting levels to be maintained automatically.

A number of unique areas within the building exist ranging from office spaces, relaxation areas for drivers, loading bays, external loading areas, and of course storage. The different spaces require different control strategies to be employed to achieve the maximum energy savings but at the same time ensuring appropriate lighting levels.

Control is mainly via sensors that are used to provide occupancy detection combined with daylight harvesting, with time based overrides in some areas. The complete system is monitored from a remote BMS system as part of the client operation.

Luminaires used consist in the most part of controllable fluorescent lighting, either linear T5 or recessed compact, high bay high intensity discharge and external flood lighting.

## Products



### 312 Multisensor

Ceiling mounted unit to provide occupancy detection. Also includes infrared receiver and light sensor to provide daylight harvesting functionality. (Ref: IF00002 & IF00005)



### 910 DIGIDIM Router

Network processor device that provides interconnection of all DALI compatible devices to form larger systems. On board timeclock and conditional logic functions allows automation and complex tasks to be carried out. (Ref: IF00004, IF00008 & IF00009)



### 458 Series Double Chassis

Unit provides installation chassis for first fix electrical installation and bypass facility. It can house any two 458 control modules to provide 16 channels of control.

### 458/CTR8 Module

Plug in module to provide 8 channels of fluorescent lighting via 1-10V, DSI, PWM or DALI protocols.


### 458/SW8 Module

Plug in modules to provide 8 channels of relay control for LED, metal halide and other non-dimmed loads.

## Wiring

- Linear T5 Fluorescent —
- CFL Down Lights —
- High Bay HID Lighting —
- External Flood Lighting —
- DALI Control Pair —

Note:-  
Not All Connections  
Or Modules Shown.

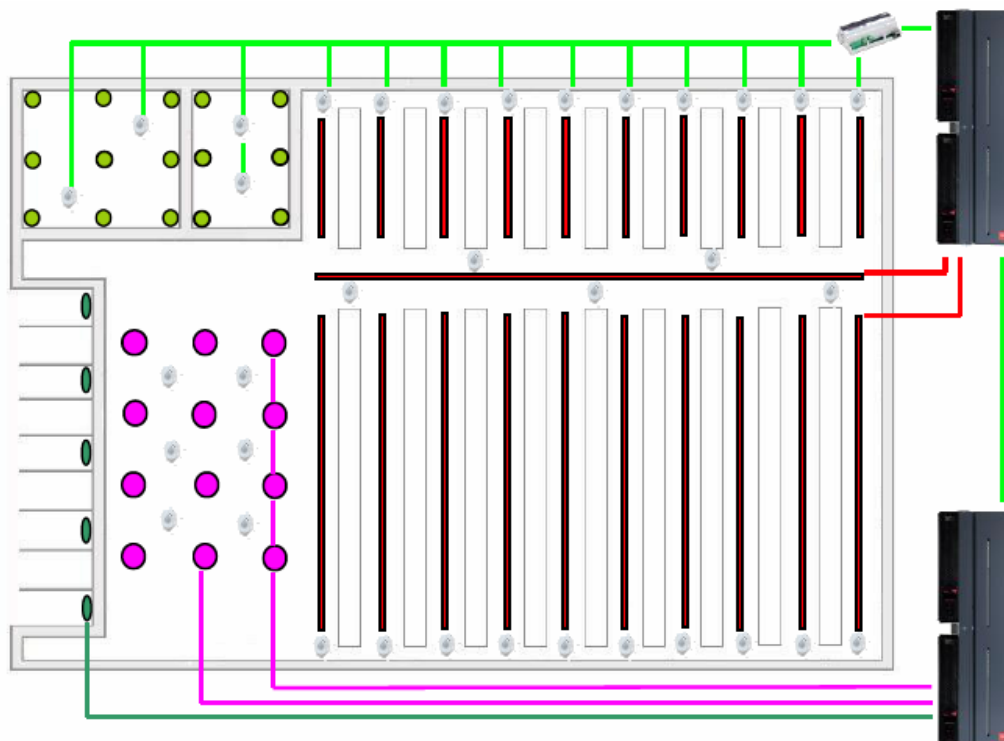

Contact your local Helvar representative or visit us online at [www.helvar.com](http://www.helvar.com)

Due to a policy of continuous improvement, Helvar reserve the right to alter specifications without notice at any time.