

Features:

- 5 Year Electrical System Warranty
- High Colour Consistency (MacAdam 3 SDCM)
- IES Files Available
- Passive Cooling
- Dimmable
- Lock In Module Fits Multiple Faces
- CRI>80

Architectural Multi-Face LED Down Light

LED options

3000K and 4000K - CRI>80

Lumiled Modules

Trim Finish

White and Black Die Cast Aluminium

Safety Glass

Clear


Control Equipment

Switched, DALI and Phase Cut

Optics

Very Narrow (16 deg) Narrow (28 deg)

Medium (40 deg) Wide (60 deg)

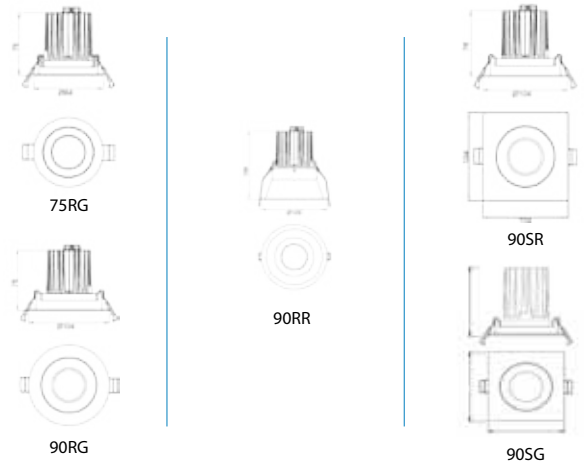

Lumen Output*		CRI80 - 3000k				CRI80 - 4000k			
Type**	Power (W)	16°	28°	40°	60°	16°	28°	40°	60°
75RG	11 watts	830	799	821	809	873	848	887	864
90RG	11 watts	830	799	821	809	873	848	887	864
90SG	11 watts	830	799	821	809	873	848	887	864
90RR	11 watts	830	799	821	809	873	848	887	864
90SR	11 watts	830	799	821	809	873	848	887	864

*All lumen output data based on LED tp/tc point at 65°C ** S = Small Body M = Medium Body L = Large Body

PRODUCT CODE BUILDER

ARES75RG - 3080 - C - W - R - V - S

Wattage

- 11W - ARES75RG
- 11W - ARES90RG
- 11W - ARES90SG
- 11W - ARES90RR
- 11W - ARES90SR

LED Colour/Index

- 3000K CRI80 - 3080
- 4000K CRI80 - 4080

Diffuser

- Clear - C

Trim Finish

- White - W
- Black - B

Mounting

- Recessed - R

Optics

- V Narrow - V
- Narrow - N
- Medium - M
- Wide - W

Control

- Switched - S
- DALI - D
- Phase Cut - P