



## Features:

- 5 Year Electrical System Warranty
- High Colour Consistency (MacAdam 3 SDCM)
- Interchangeable Zhaga LED Modules
- IES Files Available
- Passive Cooling
- Dimmable
- CRI > 80/90/98

## Architectural Extractable LED Down Light

### LED options

3000K and 4000K - CRI > 80/90/98  
Lumiled Modules

### Trim Finish

White and Black Die Cast Aluminium

### Safety Glass


Clear

### Control Equipment

Switched, DALI and Phase Cut

### Optics

Narrow (20 deg) Medium (40 deg) Wide (60 deg)

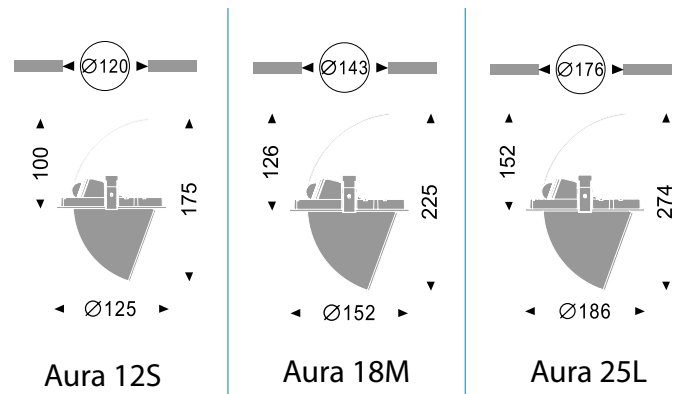

| Lumen Output* |           | CRI80 - 3000k |      |      | CRI80 - 4000k |      |      | CRI90 - 3000k |      |      | CRI90 - 4000k |      |      | CRI98 - 3000k |      |      |
|---------------|-----------|---------------|------|------|---------------|------|------|---------------|------|------|---------------|------|------|---------------|------|------|
| Type**        | Power (W) | 20°           | 40°  | 60°  | 20°           | 40°  | 60°  | 20°           | 40°  | 60°  | 20°           | 40°  | 60°  | 20°           | 40°  | 60°  |
| <b>12S</b>    | 12 watts  | 1300          | 1300 | 1300 | 1450          | 1450 | 1450 | 1110          | 1110 | 1110 | 1230          | 1230 | 1230 | 1020          | 1020 | 1020 |
| <b>18M</b>    | 18 watts  | 1830          | 1830 | 1830 | 2000          | 2000 | 2000 | 1550          | 1550 | 1550 | 1700          | 1700 | 1700 | 1400          | 1400 | 1400 |
| <b>25L</b>    | 25 watts  | 2550          | 2550 | 2550 | 2840          | 2840 | 2840 | 2050          | 2050 | 2050 | 2400          | 2400 | 2400 | 2000          | 2000 | 2000 |

\*All lumen output data based on LED tp/tc point at 65°C \*\* S = Small Body M = Medium Body L = Large Body

## PRODUCT CODE BUILDER

