
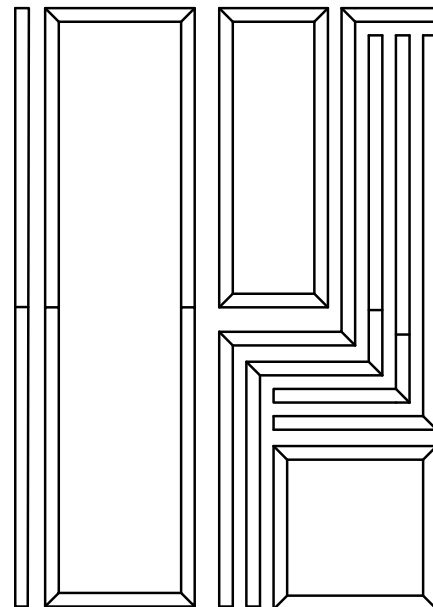



# BLINE5050

CUSTOMISABLE ARCHITECTURAL ALUMINIUM EXTRUSION



Custom Build Examples

Base Material	Aluminium
Base Finish	Naturally Anodised
Diffuser Material	PC - (Poly Carbonate)
Diffuser Transmission	70%
Dimensions	Length - 2,500mm
	Width - 50.0mm
	Height - 50.0mm
	Internal LED Bed - 38.0mm
End Treatment	Metal Caps
Mounting	Metal Clips/Joiners/Suspension

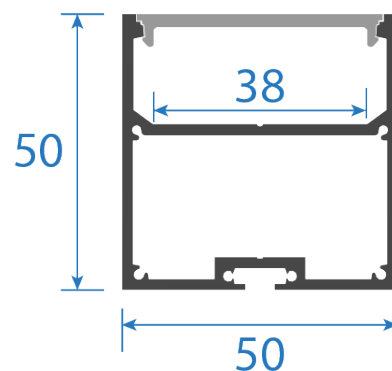

## Recommended LED options:

LED Model	Dimensions	CRI	Colour/Output	Diagram	Leads/Mtr	Cutting Unit
<b>Linearflex 20</b>	2,500mm x 20mm	>80+	3000K - W30 / 4000K - W40		280	50mm
Code						
LRP33-20-XXX80-24	(20 W/Mtr)		2600 Lm/Mtr / 2700 Lm/Mtr			
<b>Linearflex 25</b>	2,500mm x 34mm	>80+	3000K - W30 / 4000K - W40		280	50mm
Code						
LRP33-25-XXX80-24	(25 W/Mtr)		3200 Lm/Mtr / 3250 Lm/Mtr			
<b>Ledconnect 12.5</b>	499mm x 36mm	>80+	3000K - W30 / 4000K - W40		280	50mm
Code						
LCIP33-12.5-XXX80-24	(25 W/Mtr)		3200 Lm/Mtr / 3250 Lm/Mtr			
<b>Ledconnect 14.5</b>	495mm x 27mm	>80+	3000K - W30 / 4000K - W40		60	100mm
Code						
LCIP33-14.5-XXX80-24	(29 W/Mtr)		2987 Lm/Mtr / 3277 Lm/Mtr			

- 1 - Other Lumen Outputs, Wattages, CRI Values and IP Ratings available on request
- 2 - All dimensions were correct at time of publication but measurement tolerance may vary +/- 0.5mm
- 3 - All lumens per metre (L/Mtr) and wattage per metre (W/Mtr) test measurements are based on a 1 metre length of LED strip