

elle

IP.66



Architectural LED



Measurements

As detailed

LED options

2400K, 3000K, 4000K, 5000k, Red, Green, Blue, Amber, RGB, RGBW, RGBA

LED Wattages

elle 200 40 watts, elle 400 72 watts
elle 600 108 watts

Mounting Options

Surface, Wall

Extrusions Finish

Clear Anodised, Powder Coat Colours

Control Equipment


DMX, DMXRDM

Optics

Can Be Added

Diffuser

Clear, Satin

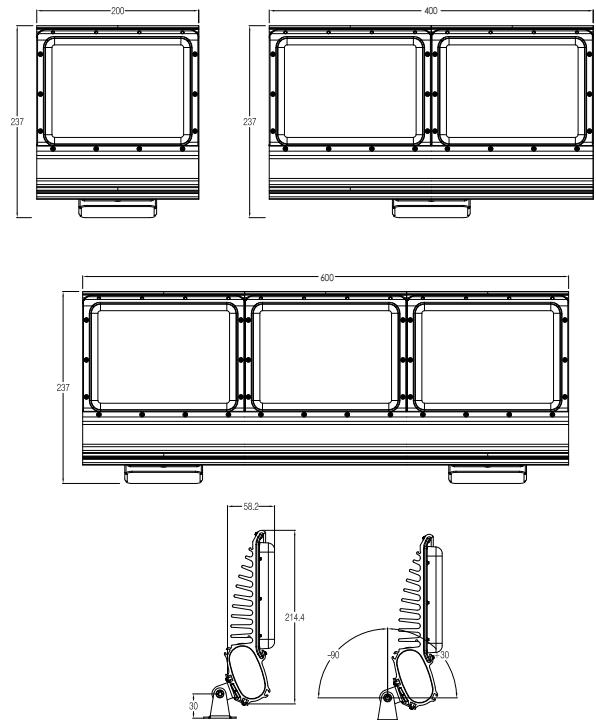

PRODUCT CODE BUILDER

elle **200** **B** **A** **C** **A** **A** **E**

Fixture Length
Length in mm

LED Colour
2400K - **A**
3000K - **B**
4000K - **C**
5000K - **D**
Red - **E**
Green - **F**
Blue - **G**
RGB - **H**
Amber - **I**
RGBW - **J**
RGBA - **K**
Custom - **X**

Diffuser
Clear - **A**
Custom - **X**

Product Finish
Clear Anodised - **A**
Powder Coat White- **B**
Powder Coat Black - **C**
Powder Coat Silver- **D**
Custom - **X**

Mounting
Wall - **A**
Surface - **B**
Custom - **X**

Optics
Standard - **A**
Custom - **X**

Control
Switched - **A**
DMX - **B**
DMXRDM - **C**
Custom - **X**

Specifications are subject to change without notice
ELLERX1

Xulux Pty Ltd
14/388 Newman Rd Geebung Q 4034
P 07 3172 7131 F 07 3161 5598
E sales@xulux.com.au
W www.xulux.com.au