



### Features:

- 5 Year Electrical System Warranty
- High Colour Consistency (MacAdam 3 SDCM)
- Interchangeable Zhaga LED Modules
- IES Files Available
- Passive Cooling
- Dimmable
- CRI>80/90/98

## Architectural LED Track Light

### LED options

3000K and 4000K - CRI>80/90/98

Lumiled Modules

### Track Adaptor

3-Circuit Universal Type

### Trim Finish

White and Black Die Cast Aluminium

### Safety Glass


Clear

### Control Equipment

Switched, DALI and Phase Cut

### Optics

Narrow (20 deg) Medium (40 deg) Wide (60 deg)

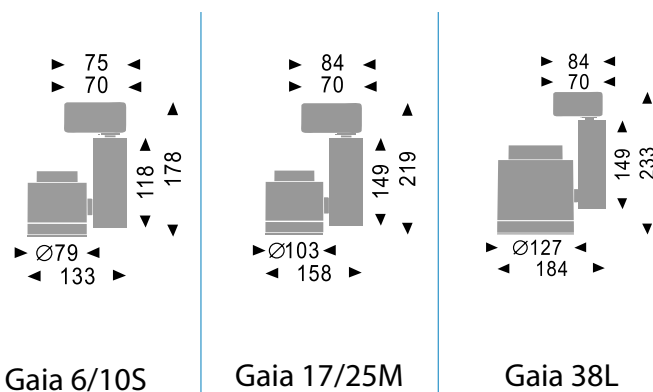

Lumen Output*		CRI80 - 3000k			CRI80 - 4000k			CRI90 - 3000k			CRI90 - 4000k			CRI98 - 3000k		
Type**	Power (W)	20°	40°	60°	20°	40°	60°	20°	40°	60°	20°	40°	60°	20°	40°	60°
<b>6S</b>	6 watts	610	610	610	660	660	660	510	510	510	560	560	560	450	450	450
<b>10S</b>	10 watts	800	800	800	900	900	900	685	685	685	770	770	770	600	600	600
<b>17M</b>	17 watts	1900	1900	1900	2100	2100	2100	1520	1520	1520	1790	1790	1790	1700	1700	1700
<b>25M</b>	25 watts	2550	2550	2550	2900	2900	2900	2050	2050	2050	2840	2840	2840	2000	2000	2000
<b>38L</b>	38 watts	3600	3600	3600	4000	4000	4000	2900	2900	2900	3400	3400	3400	2750	2750	2750

\*All lumen output data based on LED tp/tc point at 65°C \*\* S = Small Body M = Medium Body L = Large Body

## PRODUCT CODE BUILDER

**G A I A 6 S - 3 0 8 0 - C - W - T - N - S**

### Wattage

6W - **GAIA6S**  
 12W - **GAIA10S**  
 17W - **GAIA17M**  
 25W - **GAIA25M**  
 38W - **GAIA38L**

### LED Colour/Index

3000K CRI80 - **3080**  
 3000K CRI90 - **3090**  
 3000K CRI98 - **3098**  
 4000K CRI80 - **4080**  
 4000K CRI90 - **4090**

### Diffuser

Clear - **C**

### Trim Finish

White - **W**  
 Black - **B**

### Mounting

Track - **T**

### Optics

Narrow - **N**  
 Medium - **M**  
 Wide - **W**

### Control

Switched - **S**  
 DALI - **D**  
 Phase Cut - **P**