



**Features:**

- 5 Year Electrical System Warranty
- High Colour Consistency (MacAdam 3 SDCM)
- Interchangeable Zhaga LED Modules
- IES Files Available
- Passive Cooling
- Dimmable
- CRI > 80

## Architectural Surface Mount & Pendant LED Down Light

**LED options**

3000K and 4000K - CRI > 80  
Lumiled Modules

**Trim Finish**

White and Black Die Cast Aluminium

**Safety Glass**

Clear

**Control Equipment**


Switched, DALI and Phase Cut

**Fitting Options**

Surface Mount (S) and Pendant (P)

**Optics**

Narrow (20 deg) Medium (40 deg)

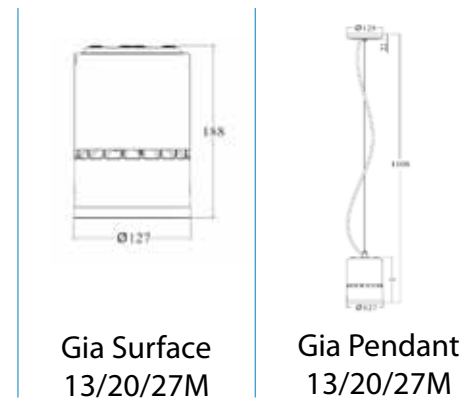

Lumen Output*		CRI80 - 3000k		CRI80 - 4000k	
Type**	Power (W)	20°	40°	20°	40°
S - 13M	13 watts	1033	1000	1229	1191
S - 20M	20 watts	1635	1600	1732	1680
S - 27M	27 watts	2174	2129	2304	2257
P - 13M	13 watts	1033	1000	1229	1191
P - 20M	20 watts	1635	1600	1732	1680
P - 27M	27 watts	2174	2129	2304	2257

\*All lumen output data based on LED tp/tc point at 65°C \*\* S = Small Body M = Medium Body L = Large Body

### PRODUCT CODE BUILDER

