


# Ledconnect14.5-27

Architectural LED Linear PCB Module







Power	14.5 watts per Module
Voltage	24VDC (23v min - 25v max)
Cutting Length	99mm
Type of LED's	Philips Lumiled SMD3014 Constant Voltage
Number of LED's	60 per Module
LED Pitch	16mm
Beam Angle	120°
Colour Temperature	3000k and 4000k
Ra	CRI>80 - IES FILE AVAILABLE
Bin/Step	Single bin/3 MacAdam steps
Lifetime	50,000 hours
Operating Temp	Celsius -20°C ~ +45°C
Dimensions mm (LWH)	495 x 27 x 6



## Lumen Output

IP20		
W30	3000k	2987 Lm/Metre
W40	4000k	3277 Lm/Metre

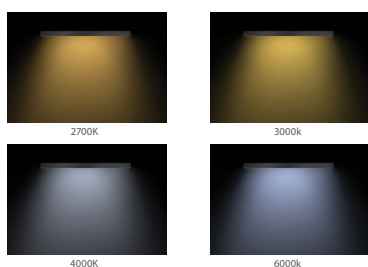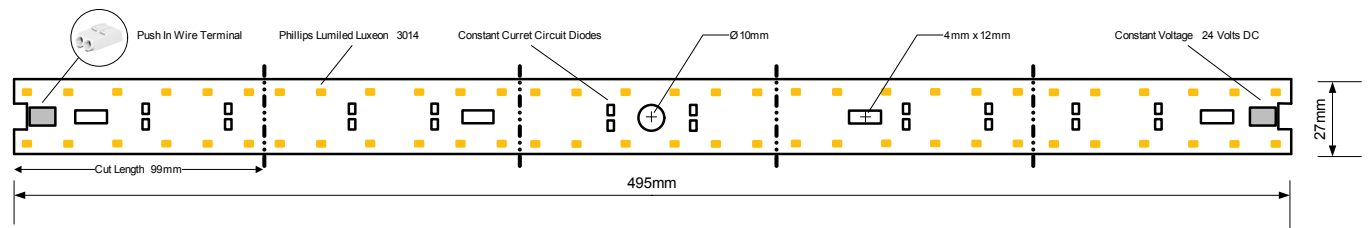

CRI 85  
CRI 70

## PRODUCT CODE BUILDER

LCIP20 -14.5- **W30** -24

LED Colour  
3000K - W30  
4000K - W40

Xulux Pty Ltd  
14/388 Newman Road Geebung Qld 4034  
P 07 3172 7131 F 07 3161 5598  
E sales@xulux.com.au  
W www.xulux.com.au

Specifications are subject to change without notice  
LEDCONNECT14.5-27RX1

**XULUX**  
LED LIGHTING SOLUTIONS