


linearflex10.1

Architectural LED Linear Flexible Strip




Power	10.1 watts per metre
Voltage	24VDC (23v min - 25v max)
Cutting Length	71 mm - 7 LED's
Number/Type of LED's	98 per mtr / SMD2835 Constant Voltage
LED Pitch	10.2mm
Beam Angle	120°
Colour Temperature	2700k, 3000k, 4000k and 6000k
Ra	CRI>80 and CRI>95 - IES FILE AVAILABLE
Bin/Step	Single bin/3 MacAdam steps
Lifetime	30,000 hours
Operating Temp	Celsius -20°C ~ +45°C
Dimensions mm (LWH)	5,000 x 8 x 1.5 (IP33) 5,000 x 10 x 5 (IP67CUV)
Mounting	Supplied with 3M adhesive to underside

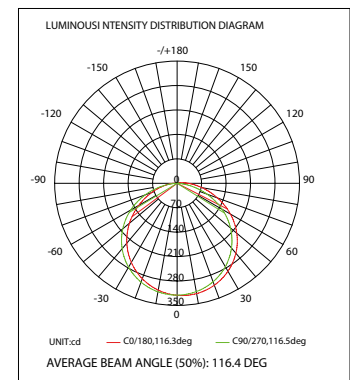


Lumen Output¹

IP33		
W27	2700k	1088 Lm/Metre
W30	3000k	1147 Lm/Metre
W40	4000k	1183 Lm/Metre
W60	6000k	1147 Lm/Metre
IP67UV		
W27	2700k	1068 Lm/Metre
W30	3000k	1127 Lm/Metre
W40	4000k	1163 Lm/Metre
W60	6000k	1127 Lm/Metre

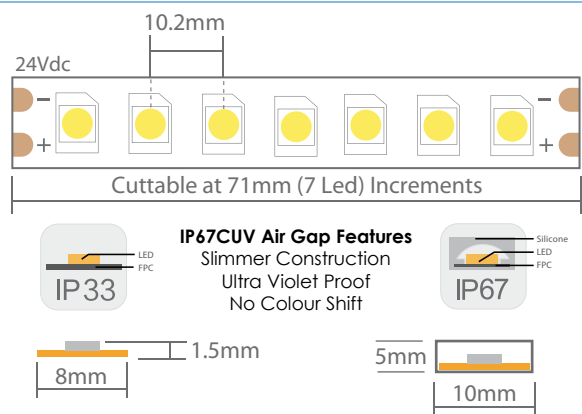

1 - Data based on 1 metre of tape. Due to tolerances of the production process and the electrical components, values for light output and electrical power can decrease up to 15%

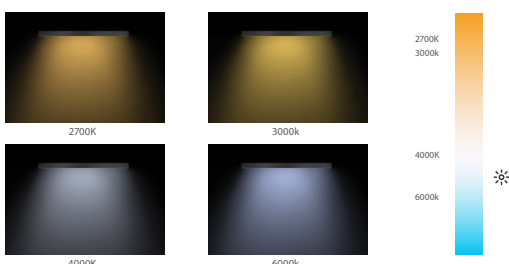

PRODUCT CODE BUILDER

LFIP33 - 10.1 - W30 80 - 24

IP Rating	LED Colour	Ra
IP33 - 33	2700K - W27	CRI>80 - 80
IP67CUV - 67	3000K - W30	CRI>95 - 95
	4000K - W40	
	6000K - W60	

XULUX Pty Ltd
 14/388 Newman Road Geebung Qld 4034
 P 07 3172 7131 F 07 3161 5598
 E sales@xulux.com.au
 W www.xulux.com.au

Specifications are subject to change without notice
 LINEARFLEX10.1RX8

XULUX
 LED LIGHTING SOLUTIONS