


linearflex14.4

Architectural LED Linear Flexible Strip




Power	14.4 watts per metre
Voltage	24VDC (23v min - 25v max)
Cutting Length	50mm - 6 LED's
Number/Type of LED's	120 per mtr / SMD2835 Constant Voltage
LED Pitch	8.33mm
Beam Angle	120°
Colour Temperature	2700k, 3000k, 4000k and 6000k
Ra	CRI>80 and CRI>95 - IES FILE AVAILABLE
Bin/Step	Single bin/3 MacAdam steps
Lifetime	30,000 hours
Operating Temp	Celsius -20°C ~ +45°C
Dimensions mm (LWH)	5,000 x 8 x 1.5 (IP33)
Mounting	Supplied with 3M adhesive to underside

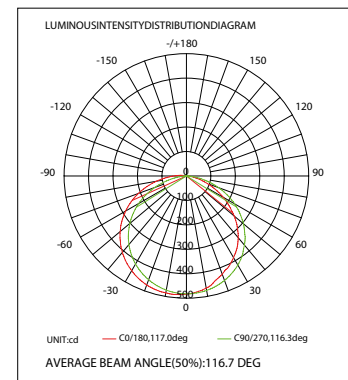


Lumen Output¹

IP33		
W27	2700k	1379 Lm/Metre
W30	3000k	1454 Lm/Metre
W40	4000k	1499 Lm/Metre
W60	6000k	1454 Lm/Metre

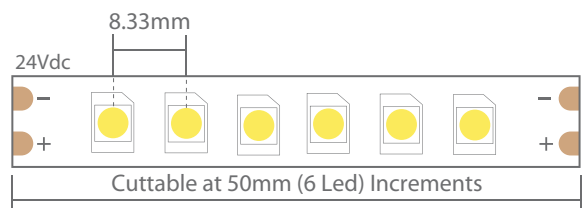

¹ - Data based on 1 metre of tape. Due to tolerances of the production process and the electrical components, values for light output and electrical power can decrease up to 15%

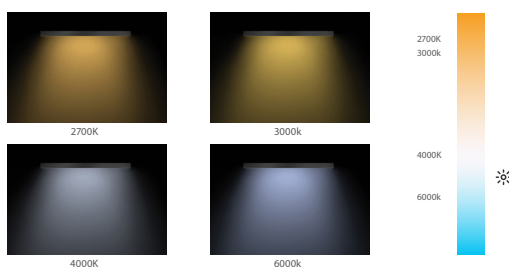

PRODUCT CODE BUILDER

LFIP33 - 14.4 - W30 80 - 24

LED Colour Ra

2700K - W27 CRI>80 - 80

3000K - W30 CRI>95 - 95

4000K - W40

6000K - W60