



linearflex17.3

Architectural LED Linear Flexible Strip





Power	17.3 watts per metre
Voltage	24VDC (23v min - 25v max)
Cutting Length	42mm - 7 LED's
Number/Type of LED's	168 per mtr / SMD2835 Constant Voltage
LED Pitch	5.95mm
Beam Angle	120°
Colour Temperature	2700k, 3000k, 4000k and 6000k
Ra	CRI>80 and CRI>95 - IES FILE AVAILABLE
Bin/Step	Single bin/3 MacAdam steps
Lifetime	30,000 hours
Operating Temp	Celsius -20°C ~ +45°C
Dimensions mm (LWH)	5,000 x 10 x 1.5 (IP33)
Mounting	Supplied with 3M adhesive to underside


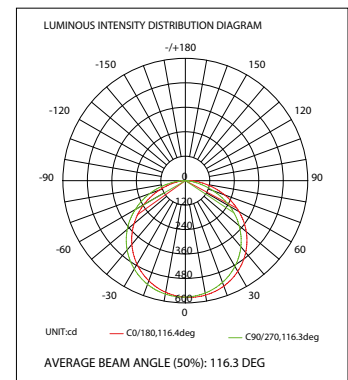


Lumen Output¹

IP33		
W27	2700k	1863 Lm/Metre
W30	3000k	1964 Lm/Metre
W40	4000k	2025 Lm/Metre
W60	6000k	1964 Lm/Metre

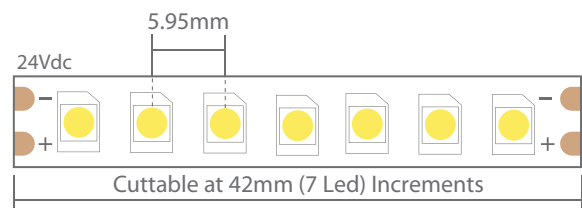

¹ - Data based on 1 metre of tape. Due to tolerances of the production process and the electrical components, values for light output and electrical power can decrease up to 15%

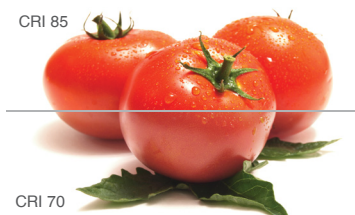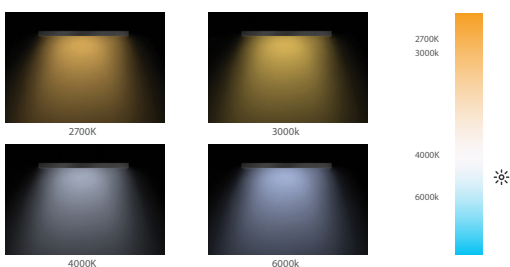

PRODUCT CODE BUILDER

LFIP33 - 17.3 - **W30** **80** - 24

LED Colour Ra

2700K - **W27** CRI>80 - **80**

3000K - **W30** CRI>95 - **95**

4000K - **W40**

6000K - **W60**