



linearflex20

Architectural LED Linear Flexible Strip




Power	20 watts per metre
Voltage	24VDC (23v min - 25v max)
Cutting Length	50mm - 14 LED's
Number/Type of LED's	280 per mtr / SMD2835 Constant Voltage
LED Pitch	7.15mm
Beam Angle	120°
Colour Temperature	2700k, 3000k, 4000k and 6000k
Ra	CRI>80 and CRI>90 - IES FILE AVAILABLE
Bin/Step	Single bin/3 MacAdam steps
Lifetime	30,000 hours
Operating Temp	Celsius -20°C ~ +45°C
Dimensions mm (LWH)	2,500 x 20 x 1.7 (IP33)
Mounting	Mounting Holes Supplied on Tape

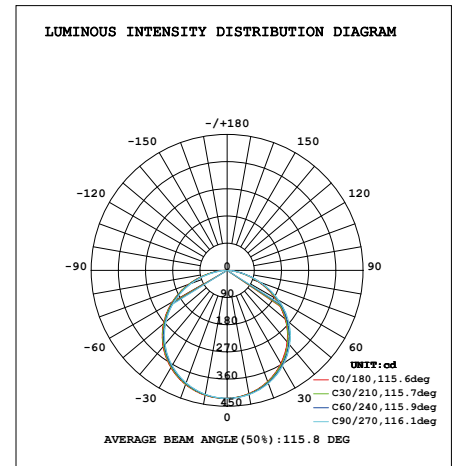


Lumen Output¹

IP33	W27	2700k	2500 Lm/Metre
	W30	3000k	2600 Lm/Metre
	W40	4000k	2700 Lm/Metre
	W60	6000k	2550 Lm/Metre

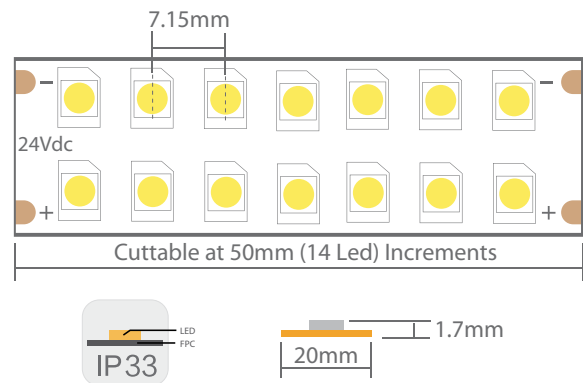

¹ - Data based on 1 metre of tape. Due to tolerances of the production process and the electrical components, values for light output and electrical power can decrease up to 15%

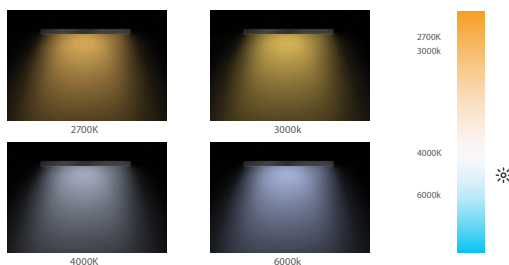

PRODUCT CODE BUILDER

LFIP33 - 20 - W30 80-24

LED Colour
 2700K - **W27**
 3000K - **W30**
 4000K - **W40**
 6000K - **W60**

Ra
 CRI>80 - **80**
 CRI>95 - **90**