




linearflex25

Architectural LED Linear Flexible Strip

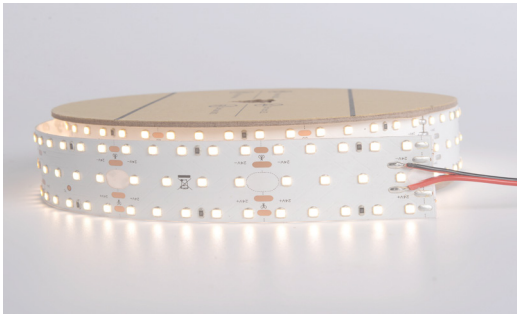


Power	25 watts per metre
Voltage	24VDC (23v min - 25v max)
Cutting Length	50mm - 14 LED's
Number/Type of LED's	280 per mtr / SMD2835 Constant Voltage
LED Pitch	10/12.5mm
Beam Angle	120°
Colour Temperature	2700k, 3000k, 4000k and 6000k
Ra	CRI>80 and CRI>90 - IES FILE AVAILABLE
Bin/Step	Single bin/3 MacAdam steps
Lifetime	30,000 hours
Operating Temp	Celsius -20°C ~ +45°C
Dimensions mm (LWH)	2,500 x 34 x 1.7 (IP33)
Mounting	Mounting Holes Supplied on Tape

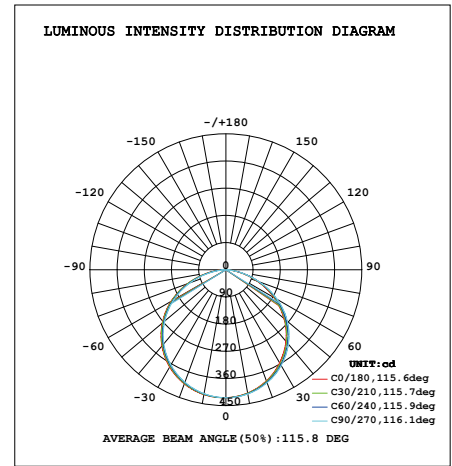


Lumen Output¹

IP33		
W27	2700k	3100 Lm/Metre
W30	3000k	3200 Lm/Metre
W40	4000k	3250 Lm/Metre
W60	6000k	3100 Lm/Metre

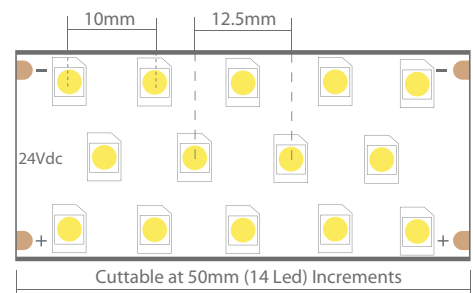

¹ - Data based on 1 metre of tape. Due to tolerances of the production process and the electrical components, values for light output and electrical power can decrease up to 15%

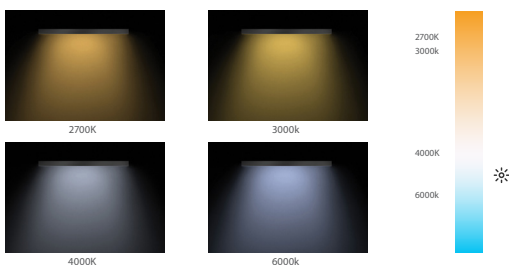

PRODUCT CODE BUILDER

LFIP33 - 25 - W30 80-24

LED Colour	Ra
2700K - W27	CRI>80 - 80
3000K - W30	CRI>95 - 90
4000K - W40	
6000K - W60	