




linearflex4.8

Architectural LED Linear Flexible Strip

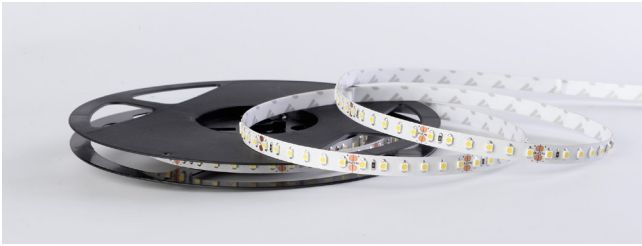


Power	4.8 watts per metre
Voltage	24VDC (23v min - 25v max)
Cutting Length	100mm - 6 LED's
Number/Type of LED's	60 per mtr / SMD3528 Constant Voltage
LED Pitch	16.66mm
Beam Angle	120°
Colour Temperature	2700k, 3000k, 4000k, 6000k, Red, Green, Blue, Yellow
Ra	CRI>80 - IES FILE AVAILABLE
Bin/Step	Single bin/3 MacAdam steps
Lifetime	30,000 hours
Operating Temp	Celsius -20°C ~ +45°C
Dimensions mm (LWH)	5,000 x 8 x 1.8 (IP33) / 5,000 x 10 x 5 (IP67C)
Mounting	Supplied with 3M adhesive to underside

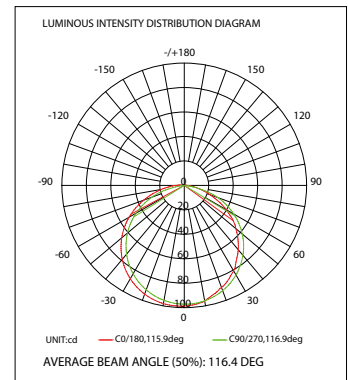


Lumen Output ¹

IP33		IP33	
W27	2700k	354 Lm/Metre	Red 145 Lm/Metre
W30	3000k	373 Lm/Metre	Green 245 Lm/Metre
W40	4000k	384 Lm/Metre	Blue 125 Lm/Metre
W60	6000k	373 Lm/Metre	Yellow 165 Lm/Metre
IP67CUV		IP67CUV	
W27	2700k	330 Lm/Metre	Red 125 Lm/Metre
W30	3000k	350 Lm/Metre	Green 220 Lm/Metre
W40	4000k	360 Lm/Metre	Blue 105 Lm/Metre
W60	6000k	350 Lm/Metre	Yellow 145 Lm/Metre

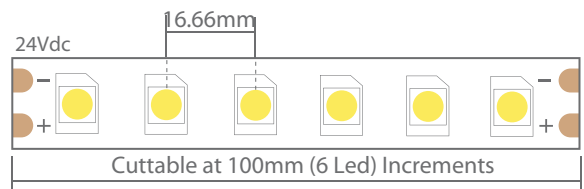

IP67CUV Air Gap Features
Slimmer Construction
Ultra Violet Proof
No Colour Shift

¹ - Data based on 1 metre of tape. Due to tolerances of the production process and the electrical components, values for light output and electrical power can decrease up to 15%

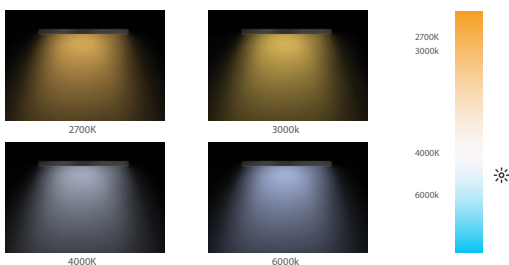

PRODUCT CODE BUILDER

LFIP 33 - 4.8- W30 80-24

IP Rating

IP33 - **33**
IP67CUV - **67**

LED Colour

2700K - **W27**
3000K - **W30**
4000K - **W40**
6000K - **W60**
RED/GREEN/BLUE/YELLOW - **R/G/B/Y**

XULUX Pty Ltd
14/388 Newman Road Geebung Qld 4034
P 07 3172 7131 F 07 3161 5598
E sales@xulux.com.au
W www.xulux.com.au

Specifications are subject to change without notice
LINEARFLEX4.8RX8

XULUX
LED LIGHTING SOLUTIONS