




linearflex9.6

Architectural LED Linear Flexible Strip

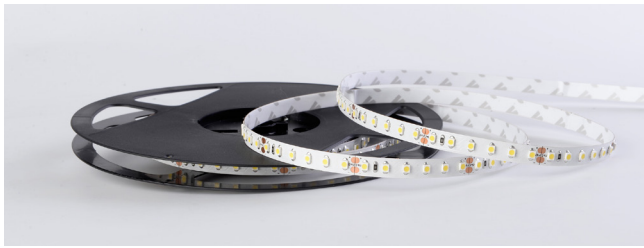


Power	9.6 watts per metre
Voltage	24VDC (23v min - 25v max)
Cutting Length	50mm - 6 LED's
Number/Type of LED's	120 per mtr / SMD3528 Constant Voltage
LED Pitch	8.33mm
Beam Angle	120°
Colour Temperature	2700k, 3000k, 4000k, 6000k, Red, Green, Blue, Yellow
Ra	CRI>80 - IES FILE AVAILABLE
Bin/Step	Single bin/3 MacAdam steps
Lifetime	30,000 hours
Operating Temp	Celsius -20°C ~ +45°C
Dimensions mm (LWH)	5,000 x 8 x 1.8 (IP33) / 5,000 x 10 x 5 (IP67C)
Mounting	Supplied with 3M adhesive to underside

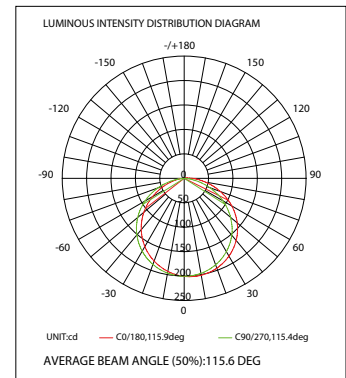


Lumen Output ¹

IP33		IP33	
W27	2700k	701 Lm/Metre	Red 286 Lm/Metre
W30	3000k	739 Lm/Metre	Green 490 Lm/Metre
W40	4000k	762 Lm/Metre	Blue 245 Lm/Metre
W60	6000k	739 Lm/Metre	Yellow 326 Lm/Metre
IP67CUV		IP67CUV	
W27	2700k	611 Lm/Metre	Red 265 Lm/Metre
W30	3000k	629 Lm/Metre	Green 475 Lm/Metre
W40	4000k	642 Lm/Metre	Blue 225 Lm/Metre
W60	6000k	629 Lm/Metre	Yellow 300 Lm/Metre

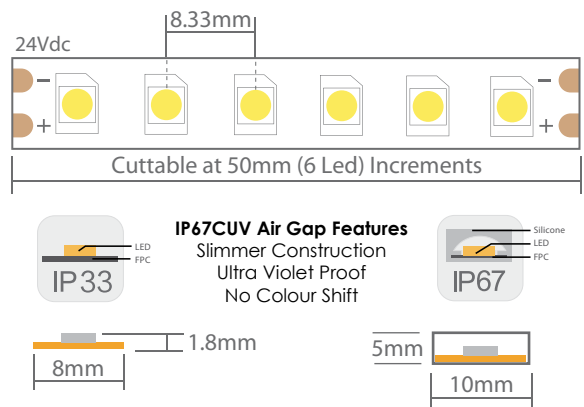

¹ - Data based on 1 metre of tape. Due to tolerances of the production process and the electrical components, values for light output and electrical power can decrease up to 15%

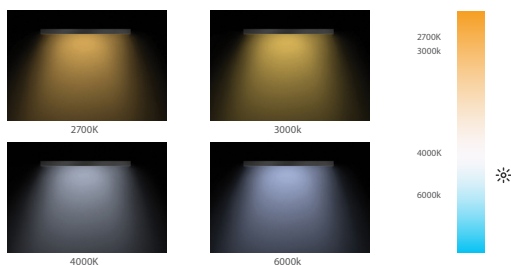

PRODUCT CODE BUILDER

LFIP **33** - 9.6 - **W30** 80 - 24

IP Rating	LED Colour
IP33 - 33	2700K - W27
IP67CUV - 67	3000K - W30
	4000K - W40
	6000K - W60
	RED/GREEN/BLUE/YELLOW - R/G/B/Y

XULUX Pty Ltd
 14/388 Newman Road Geebung Qld 4034
 P 07 3172 7131 F 07 3161 5598
 E sales@xulux.com.au
 W www.xulux.com.au

Specifications are subject to change without notice
 LINEARFLEX9.6RX8

XULUX
 LED LIGHTING SOLUTIONS