



**Features:**

- 5 Year Electrical System Warranty
- High Colour Consistency (MacAdam 3 SDCM)
- Interchangeable Zhaga LED Modules
- IES Files Available
- Passive Cooling
- Dimmable
- CRI>80/90/98

**Architectural Adjustable LED Down Light**

**LED options**

3000K and 4000K - CRI>80/90/98  
Lumiled Modules

**Trim Finish**

White and Black Die Cast Aluminium

**Safety Glass**


Clear

**Control Equipment**

Switched, DALI and Phase Cut

**Optics**

Narrow (20 deg) Medium (40 deg) Wide (60 deg)

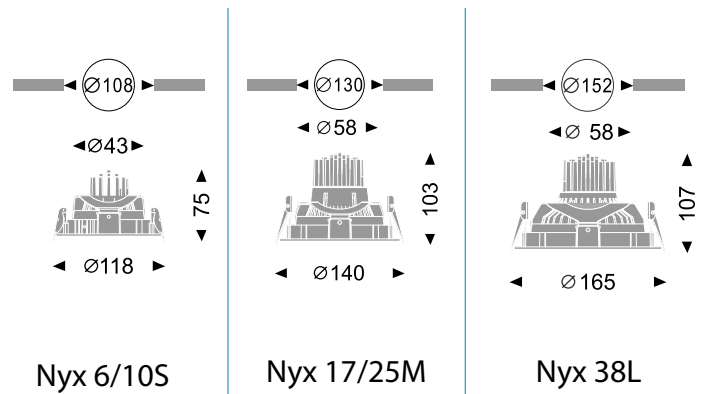

Lumen Output*		CRI80 - 3000k			CRI80 - 4000k			CRI90 - 3000k			CRI90 - 4000k			CRI98 - 3000k		
Type**	Power (W)	20°	40°	60°	20°	40°	60°	20°	40°	60°	20°	40°	60°	20°	40°	60°
6S	6 watts	610	610	610	660	660	660	510	510	510	560	560	560	450	450	450
10S	10 watts	800	800	800	900	900	900	685	685	685	770	770	770	600	600	600
17M	17 watts	1900	1900	1900	2100	2100	2100	1520	1520	1520	1790	1790	1790	1700	1700	1700
25M	25 watts	2550	2550	2550	2840	2840	2840	2050	2050	2050	2400	2400	2400	2000	2000	2000
38L	38 watts	3600	3600	3600	4000	4000	4000	2900	2900	2900	3400	3400	3400	2750	2750	2750

\*All lumen output data based on LED tp/tc point at 65°C \*\* S = Small Body M = Medium Body L = Large Body

**PRODUCT CODE BUILDER**

