

# sapphire



## Features:

- 2 Year Electrical System Warranty
- IES Files Available
- Passive Cooling
- Dimmable
- 180 Deg Rotatable
- CRI > 80

## Architectural Tilt LED Down Light

### LED options

3000K and 4000K - CRI > 80

### Trim Finish

White

### Safety Glass


Clear

### Control Equipment

Switched, DALI and Phase Cut

### Optics

Wide (50 deg)

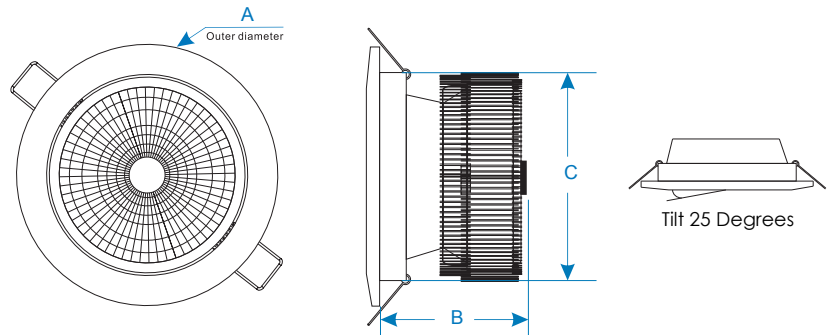

Lumen Output*		CRI80 - 3000k	CRI80 - 4000k	Dimensions - mm			Cutout
Type	Power (W)	50°	50°	A	B	C	⌀
6	6 watts	540	560	90	60	75	75
10	10 watts	900	950	90	75	75	75
15	15 watts	1350	1400	110	85	95	95

\*All lumen output data based on LED tp/tc point at 65°C

## PRODUCT CODE BUILDER

