



# XLINE-R

ARCHITECTURAL LOW GLARE RECESSED FIXTURES



85X85  
SYMMETRIC



55X90  
ASYMMETRIC

Recessed linear modules with a choice of four lengths.  
Louvred with lense for ultimate glare and optical control.  
Remote mount driver options.  
DALI, 1-10vdc, Wireless, Phase Cut and Switch.


Base Material	Aluminium
Base Finish	Powder Coated White
Louvre & Lense	Vacuum Aluminium & PC - (Poly Carbonate)
System Efficacy	111 Lumens per Watt
Dimensions	See Table Below
Beam Angles	85° x 85°, 55° x 90°
End Treatment	Metal Caps
Mounting	Fixed Spring Clips




T-Bar options available

1195mm x 295mm  
595mm x 595mm

8/12/28 Cell Version

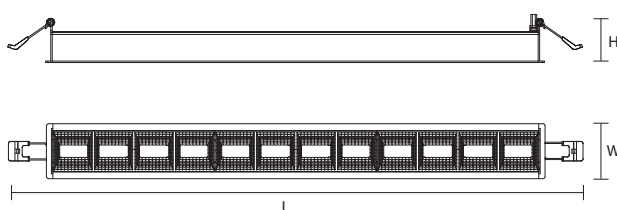

4 Cell Version

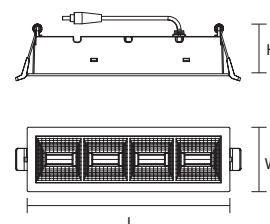

Data based on 4000K.

	Driver Current	Watts	System Lumens	Cut out (mm)	LxWxH (mm)	Max Wattage
4 Cell	175mA - 400mA	6.3W - 14.4W	699 - 1598	172 x 47	183 x 58 x 47	16W
8 Cell	350mA - 650mA	12.6W - 23.4W	1398 - 2597	340 x 47	348 x 57 x 46	24W
12 Cell	350mA - 1000mA	12.6W - 36W	1398 - 3996	505 x 47	515 x 57 x 46	36W
28 Cell	350mA - 1250mA	12.6W - 45W	1398 - 4995	1167 x 47	1178 x 57 x 46	45W