



# linearflex9.6CC


Architectural LED Linear Flexible Strip

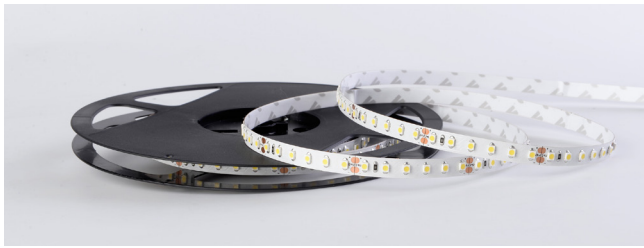

Power	9.6 watts per metre
Voltage	24VDC (23v min - 25v max)
Cutting Length	50mm - 6 LED's
Number/Type of LED's	120 per mtr / SMD2835 Constant Current
LED Pitch	8.33mm
Beam Angle	120°
Colour Temperature	2700k, 3000k, 4000k
Ra	CRI>95 - IES FILE AVAILABLE
Bin/Step	Single bin/3 MacAdam steps
Lifetime	30,000 hours
Operating Temp	Celsius -20°C ~ +45°C
Dimensions mm (LWH)	5,000 x 12 x 1.5 (IP33) - (20,000 mm rolls available)
Mounting	Supplied with 3M adhesive to underside

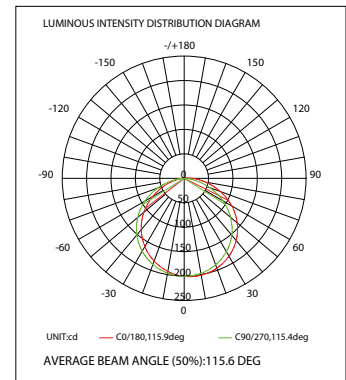


Maximum single run length  
using single feed  
Up to 20 Metres





## Lumen Output<sup>1</sup>

IP33		
W27	2700k	622 Lm/Metre
W30	3000k	683 Lm/Metre
W40	4000k	759 Lm/Metre

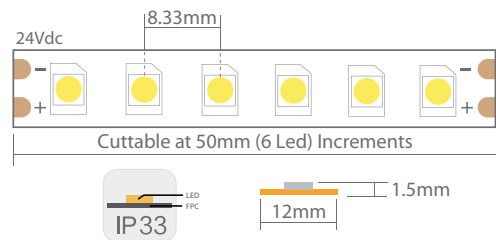

<sup>1</sup> - Data based on 1 metre of tape. Due to tolerances of the production process and the electrical components, values for light output and electrical power can decrease up to 15%

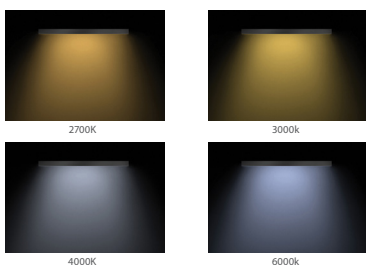

CRI 85



CRI 70

## PRODUCT CODE BUILDER

LFIP33 - 9.6CC - **W27** 95 - 24

LED Colour

2700K - **W27**

3000K - **W30**

4000K - **W40**