



# linearflex9.6SV

Architectural LED Linear Flexible Strip

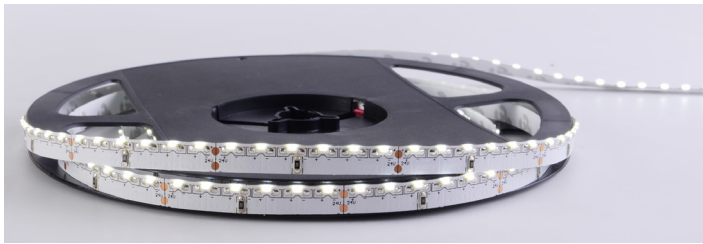


Power	9.6 watts per metre
Voltage	24VDC (23v min - 25v max)
Cutting Length	50mm - 6 LED's
Number/Type of LED's	120 per mtr / SMD335 Constant Voltage
LED Pitch	8.29mm
Beam Angle	120°
Colour Temperature	3000k, 4000k and 6000k
Ra	CRI>80 - IES FILE AVAILABLE
Bin/Step	Single bin/3 MacAdam steps
Lifetime	30,000 hours
Operating Temp	Celsius -20°C ~ +45°C
Dimensions mm (LWH)	5,000 x 8 x 2 (IP33)
Mounting	Supplied with 3M adhesive to underside


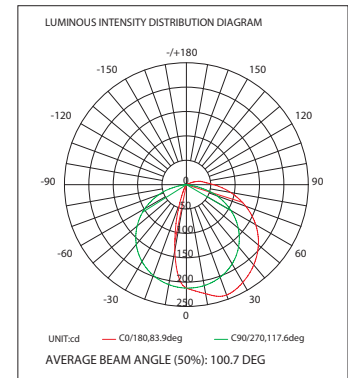


## Lumen Output<sup>1</sup>

IP33		
W30	3000k	894 Lm/Metre
W40	4000k	921 Lm/Metre
W60	6000k	894 Lm/Metre

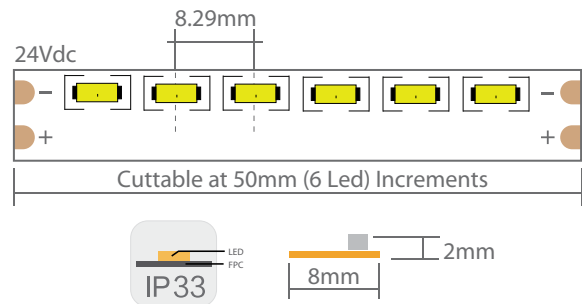

<sup>1</sup> - Data based on 1 metre of tape. Due to tolerances of the production process and the electrical components, values for light output and electrical power can decrease up to 15%

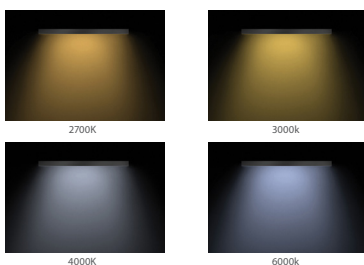

## PRODUCT CODE BUILDER

**LFIP33 - 9.6SV - W30 70 - 24**

LED Colour  
 3000K - **W30**  
 4000K - **W40**  
 6000K - **W60**