

Hotel Restaurant Application



Hotel Fenix, Lisbon

- Easy To Use
- Simple To Install
- Cost Effective
- Remote Capability
- Multi-point Control
- Creative Ambience

Requirements

A restaurant area catering for multiple dining requirements, such as an elegant breakfast buffet, business lunches, and romantic evenings with fine dining.

A single control point is required at the matie'd station to allow manual selection of the pre-programmed scenes applicable to the ambience required. In addition a secondary control point is required, to provide lighting levels suitable for restaurant set-up and cleaning by staff.

Luminaires used consist of decorative pendants, low voltage ceiling recessed halogen downlights, directional spotlights for accent to the buffet displays with the use of compact fluorescent lighting for general set-up and cleaning.

Products



Modular Panel

Wall mounted control panel supplied in a range of combinations from two to eight buttons. All fitted with an infrared receiver.



458 Series Double Chassis

Unit provides installation chassis for first fix electrical installation and bypass facility. It can house any two 458 control modules to provide 16 channels of control.

458/DIM8 Module x 2


Plug in module to provide 8 channels of 5A thyristor dimming for control of low voltage halogen

458 Series Option Module

Plug in DIN rail module to allow conversion of up to 4 circuits to control fluorescent lighting via 1-10V, DSI, PWM or DALI protocols.

Wiring

- LNE Down Lights —
- LNE Spot Lights —
- Decorative Pendants —
- CFL Down Lights —
- DALI Control Pair —

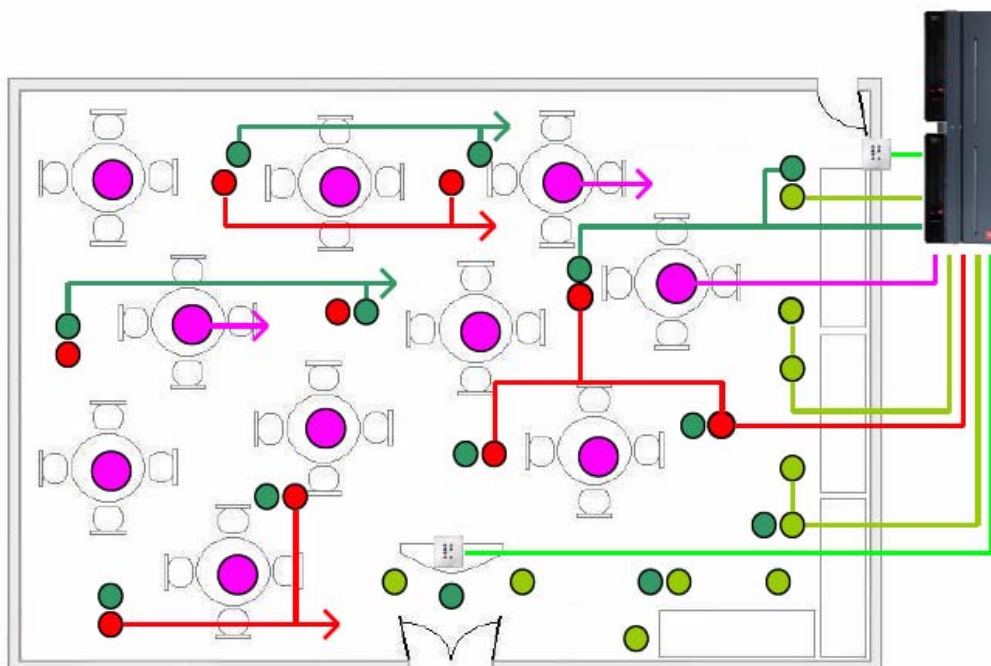

Note:-
Not All Connections
Shown.

Contact your local Helvar representative or visit us online at www.helvar.com

Due to a policy of continuous improvement, Helvar reserve the right to alter specifications without notice at any time.